
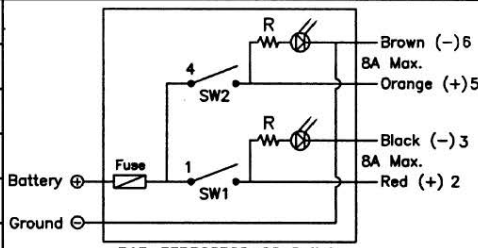


# Lighter plug

Rating	12V DC 15A	<p style="text-align: center;">Circuit Diagram</p> 
Insulation Resistance	DC 500V 100 Mohm Min.	
Dielectric Strength	AC 1000V 1 Minute	
Operation Temperature	-0°C~60°C	
Fuse Type	15A 6.4*32 Glass Tube	
Switch 1 Function	SPST ON-OFF Illuminated	
Switch 2 Function	SPST ON-OFF Illuminated	

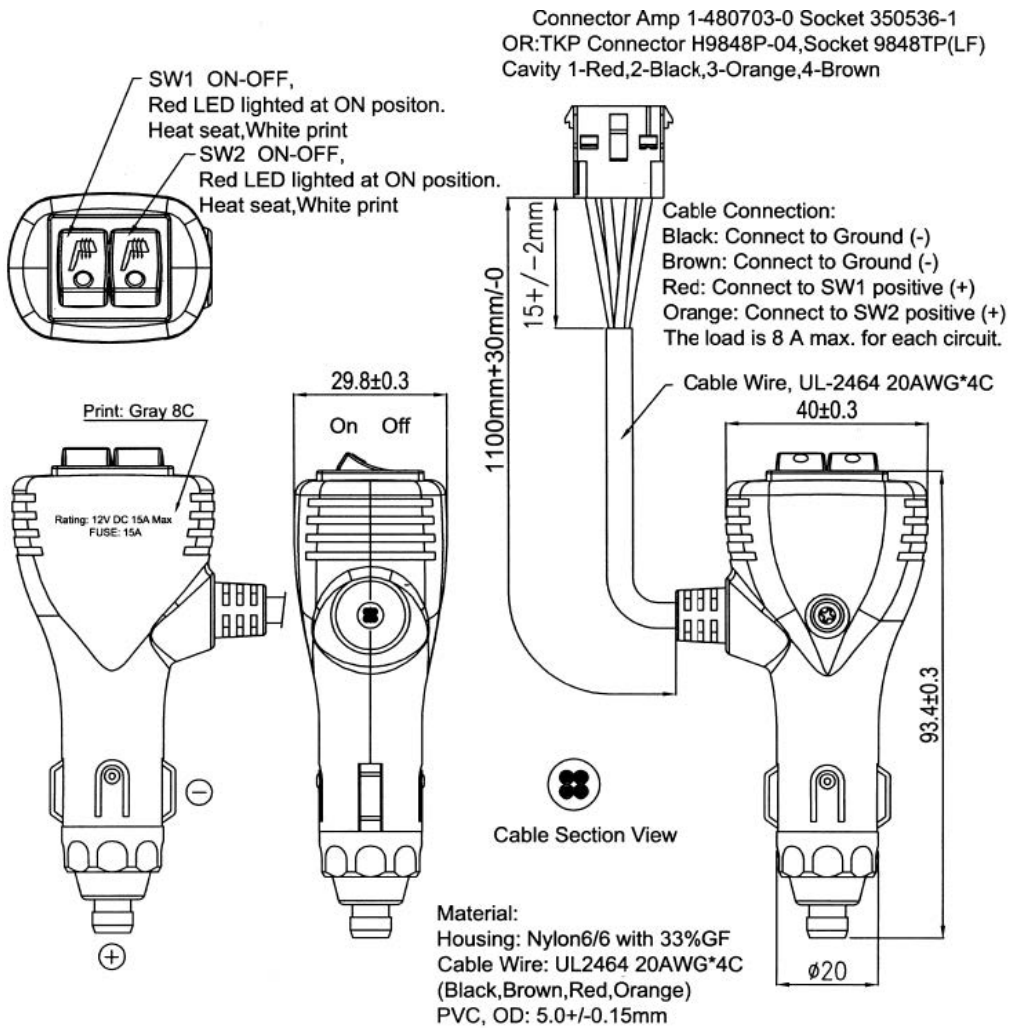

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).  
 All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.  
 © Copyright 2017 by Conrad Electronic SE.