

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 15A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Torque value : M3 , 4.43Lb.in
- 4. Wire range : 28~12AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	18A



- 2. Torque value : M3 , 0.5N·m
- 3. Wire range : 1.0~2.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.00mm, Poles : N=02-12P
- 3. Stripping length : 7~8mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:



Pitch range	In		mm		Nominal dimension	range		Tolerance
	mm	In	mm	In		mm	In	
6	TO	10	TO	30	60	TO	150	0.1/10
10	TO	24	TO	60	100	TO	150	≤
15	±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2

6. RoHS Compliance

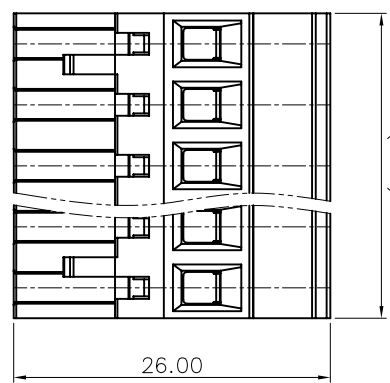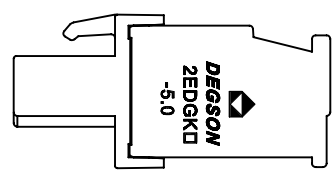


D

D

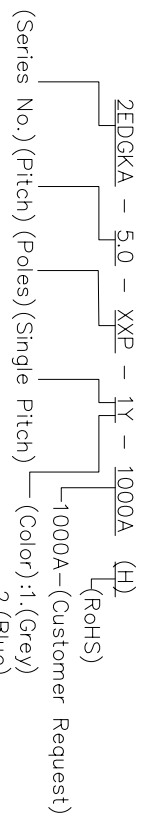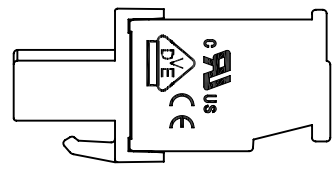


- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

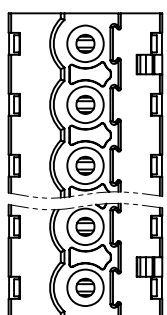

B

B

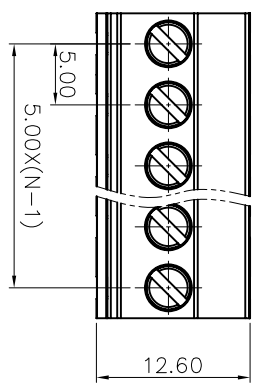

G

G

F

F

E

E

D

D

C

C

B

B

A

A

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:		CHKD:	
DRFT:	WJQ 2017.03.10	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	DO NOT SCALE DRAWING
		REV	DO-1
		SHEET	1/1
		SCALE	1:1