

# Pin strip - PST 1,3/12-5,0 - 1933286

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 12, Pitch: 5 mm, Color: Black, Contact surface: Tin, Assembly: Soldering, Voltage and current depend on the plug-in terminal block used. The value of the weaker component is always valid. Over 16 pos. upon request. The pin strip is made of highly temperature resistant plastic and is thus suitable for the reflow process.

The figure shows a 10-position version of the product

## Product Features

- Pin strip with pad pushed on for suction pipette for optional tape-on-reel packing
- Various pin lengths and pin geometries available on request
- 5.0 mm pitch
- Optimum pin geometry so as to not damage the plug
- Pin strip available in machine-capable packaging (tube magazine or tape)
- Reflow solderable pin strip, optimized for COMBICON compact connectors

## Key commercial data

<b>package_quantity</b>	50
<b>GTIN</b>	4017918918774

## Technical data

### Dimensions

<b>Length</b>	2.8 mm
<b>Pitch</b>	5 mm
<b>Dimension a</b>	55 mm
<b>Pin dimensions</b>	1,3 mm
<b>Hole diameter</b>	1.5 mm

### General

<b>Range of articles</b>	PST 1,3/..-V
<b>Insulating material group</b>	IIIa
<b>Rated surge voltage (III/3)</b>	4 kV
<b>Rated surge voltage (III/2)</b>	4 kV
<b>Rated surge voltage (II/2)</b>	4 kV
<b>Rated voltage (III/3)</b>	250 V
<b>Rated voltage (III/2)</b>	320 V
<b>Rated voltage (II/2)</b>	400 V
<b>Connection in acc. with standard</b>	EN-VDE
<b>Nominal current I<sub>N</sub></b>	12 A (depends on the plug used)

# Pin strip - PST 1,3/12-5,0 - 1933286

## Technical data

### General

Maximum load current	12 A (depends on the plug used)
Insulating material	PA
Inflammability class according to UL 94	V0
Color	Black
Number of positions	12

## classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637


### UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	34131203
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

## approvals

CSA / UL Recognized / SEV / cUL Recognized / GOST / CCA / GOST / cULus Recognized /

### Approval details

		
Usegroups	B	D
Nominal voltage UN	300 V	300 V
Nominal current IN	5 A	5 A
mm <sup>2</sup> /AWG/kcmil		

# Pin strip - PST 1,3/12-5,0 - 1933286

## approvals

**UL Recognized**

Usegroups	B	D
Nominal voltage UN	300 V	300 V
Nominal current IN	16 A	10 A
mm <sup>2</sup> /AWG/kcmil		

**SEV**

Nominal voltage UN	250 V
Nominal current IN	10 A
mm <sup>2</sup> /AWG/kcmil	

**cUL Recognized**

Usegroups	B	D
Nominal voltage UN	300 V	300 V
Nominal current IN	16 A	10 A
mm <sup>2</sup> /AWG/kcmil		

**GOST**

**CCA**


Nominal voltage UN	250 V
Nominal current IN	10 A
mm <sup>2</sup> /AWG/kcmil	

**cULus Recognized**


## Drawings

# Pin strip - PST 1,3/12-5,0 - 1933286

Drilling diagram

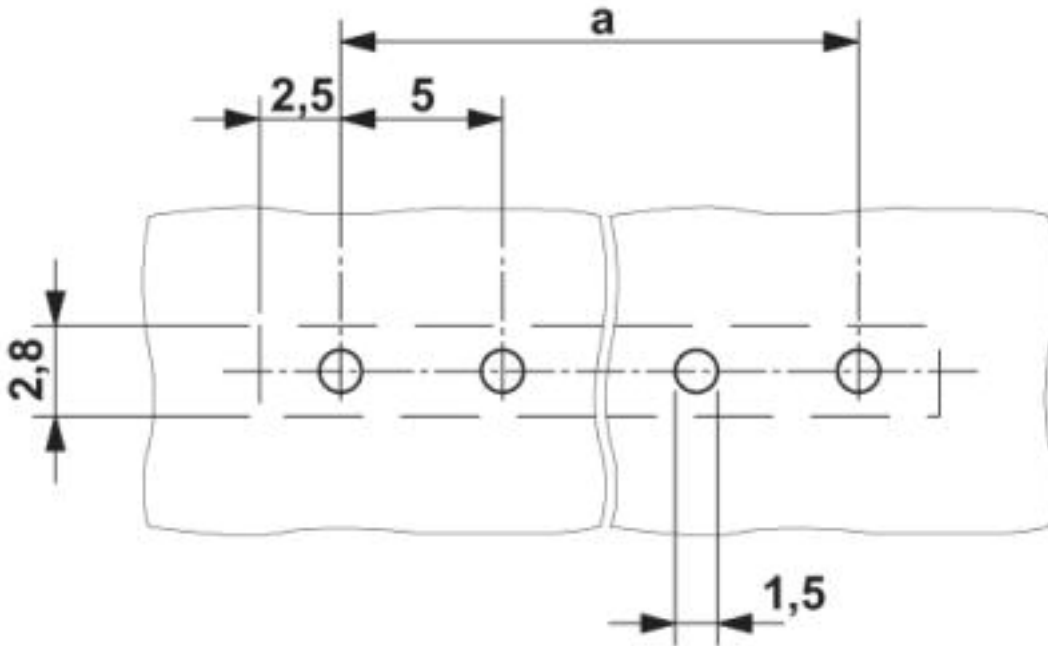


Diagram

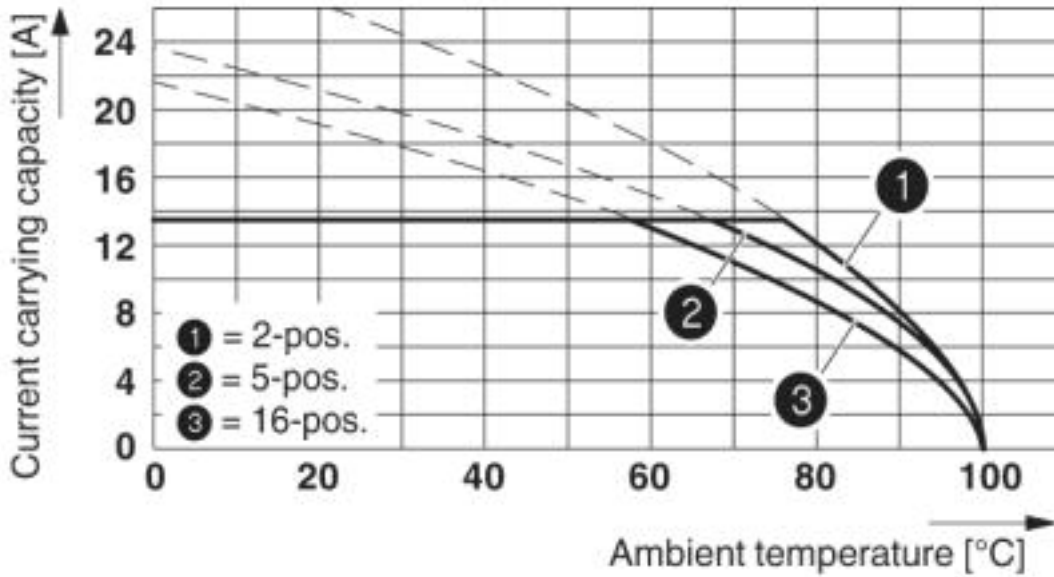


# Pin strip - PST 1,3/12-5,0 - 1933286

Diagram

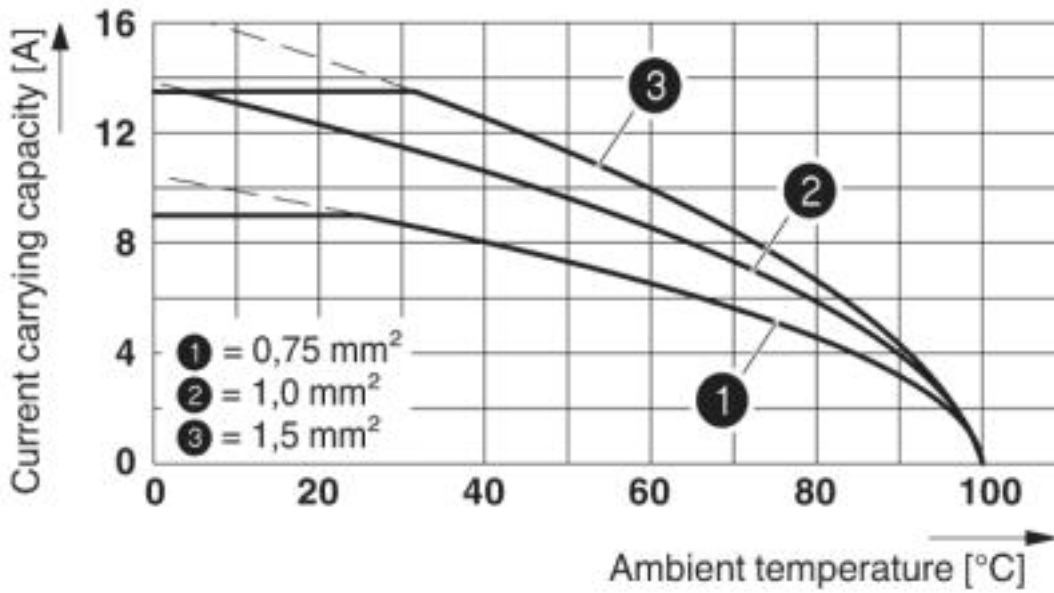


Diagram

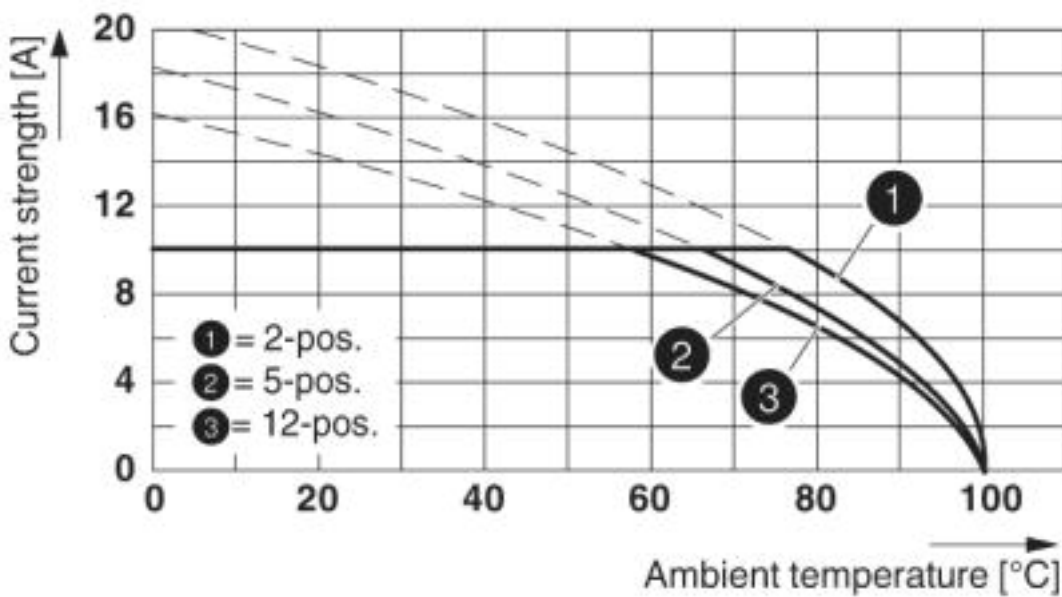

Type: PTS 1,5/...-PH-5,0 with PST 1,3/...-5,0

# Pin strip - PST 1,3/12-5,0 - 1933286

Dimensioned drawing

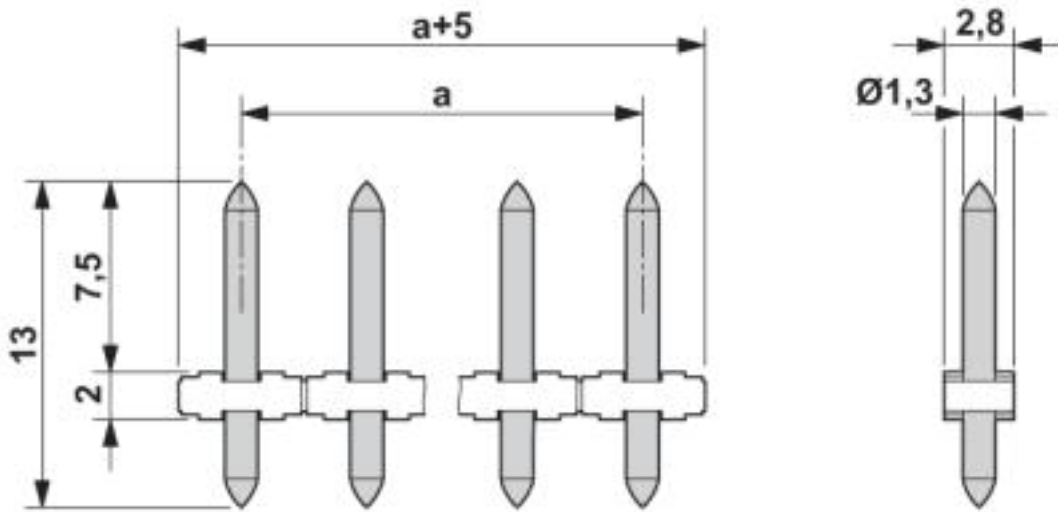

© Phoenix Contact 2013 - all rights reserved  
<http://www.phoenixcontact.com>